



SUNROTOR®
Solar Products
www.sunrotor.com
1(866) 246-7652

SR-4

Helical Rotor Submersible Solar Pump



- Nominal 24 volt operation
- Usable voltage range of 12-24 volts
- Power range of 195 to 390 watts
- Solar, battery or dual-source
- Maximum functional lift capability of 150 ft (46 m)
- Max flow at 100 ft (30 m) is 3.9 gallons/min (14.76 liters/min) with 390 watts and 24 volts PV input
- Highly reliable, single moving part progressive cavity technology
- Readily repairable in the field
- 3/4 inch FNPT output
- Designed for submersible operation up to 100 ft
- 19 inches in height (48.3 cm)
- 3 inch diameter (76 mm) fits 3.5 inch (89 mm) casing
- Light weight - 12 pounds (5.4 kg)
- Submersible motor protected from ambient water by oil filled jacket (vegetable based oil protects potable water source if vessel is compromised)
- Brushless DC motor technology avoids conventional DC brush maintenance and replacement
- All electronics are mounted above ground for longer life and easy access
- Entire pump body is stainless steel to comply with all local code and pump installation requirements
- CE certified
- ISO 9001




SRC-M50T

12-24 DC Input Controller

- State of the art controller electronics contained in a NEMA standard conduit connection box
- Clear cover allows visible inspection of connections and LED status lights
- MPPT and current boost technology incorporated
- Wide operational range with max input Voc tolerance of 50 volts (DC)
- Battery or solar capabilities with low voltage cutoff for battery protection
- Wired for low water cutoff and for tank-full float cutoff switches
- Fully adjustable speed control is easily accessed through a hinged, snap hasp cover
- Housed in a highly durable metal box with cooling fins cast on the back
- Dimensions: 12" (30.5 cm) x 4.5" (11.4 cm) x 8" (20.3 cm)

The follow page lists the pump curves for each panel configuration. Do not exceed the depth listed for each configuration, as it can damage the pump and void the warranty.




SUNROTOR®
Solar Products
 www.sunrotor.com
 1(866) 246-7652

2 Year Warranty Outside the U.S.
5 Year Total Warranty for
Customers in the U.S./Canada

- 2 years at full replacement cost
- 3 years declining (60%, 40%, 20% of the original purchase price)

SunRotor® SR-4 Helical Rotor Pump
SRC-M50T DC Input Controller

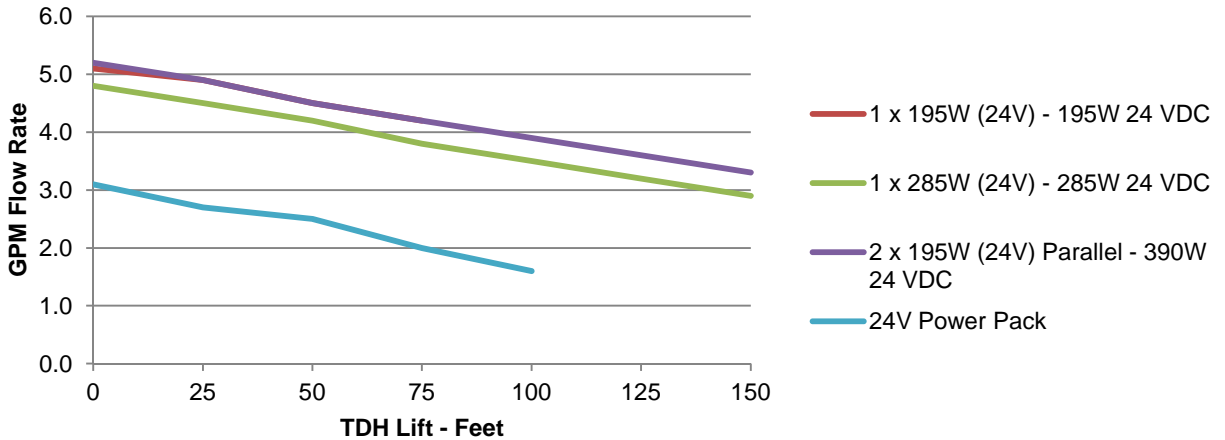

		TDH Lift - Feet / GPM Flow Rate								
Panels	Configuration	Watts	Voltage	0	25	50	75	100	125	150
1	195 W (24V)	195	24 VDC	5.1	4.9	4.5	4.2			
1	285 W (24V)	285	24 VDC	4.8	4.5	4.2	3.8	3.5	3.2	2.9
2	195 W (24V) Parallel*	390	24 VDC	5.2	4.9	4.5	4.2	3.9	3.6	3.3
0	24V Power Pack**	N/A	24 VDC	3.1	2.7	2.5	2.0	1.6		
		Amperage								
Panels	Configuration	Watts	Voltage	0	25	50	75	100	125	150
1	195 W (24V)	195	24 VDC	2.6	3.2	3.9	4.7			
1	285 W (24V)	285	24 VDC	2.3	3.0	3.7	4.4	5.1	5.7	6.5
2	195 W (24V) Parallel	390	24 VDC	2.5	3.1	3.9	4.5	5.3	6.0	6.6
0	24V Power Pack	N/A	24 VDC	2.8	3.5	4.2	5.1	6.0		

10 gauge wire 8 gauge wire

* Contact us to learn more about the advantages of our higher wattage panel configurations for those in areas that average less than 5 peak sun hours daily

**Not intended for continuous 24/7 use. Subsequently, our warranty on battery-only systems are as follows: 1 year full replacement, and 18 months declining every 6 months (60%, 40%, 20%)